






Painters working conditions improved 喷涂环境的改善

Wet painting to powder coating 油漆改粉

Complicated part 工件复杂



<u>Layout</u>

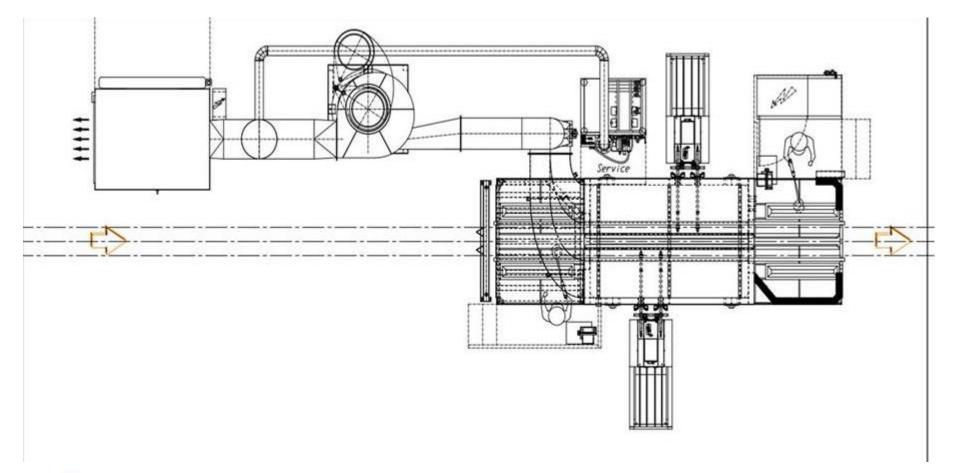



Installation Key Data


Parts:		Truck Part			
Parts Size:		Н	1`750 mm		
		W	450 mm		
Line Speed:		up to 3 m/min			
Description	:				
	1 x	Magic Compact / 16,000			
	1 x	OptiFlex AS05- 12+2			
	12 x	OptiGun GA02			
	2 x	OptiSelect GM03			

- 1 x MagicControl CM-30
- 1 X Opti Center OC02

Installation: 2014





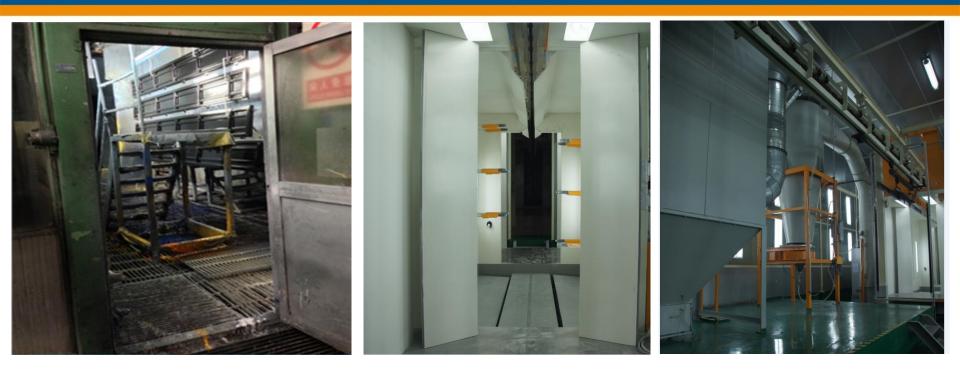

◆Before customer use wet painting, it's first time to coat truck part by powder.

- After few months production, following data collected from customer:
- ◆ Environment improved

	Investment (thousand Yuan)		Material cost (RMBY / per truck)		Energey	Consutruction
	Equipment	Construction & waste gas treatment	powder	diluent,Coagulant for paint fog	Consumption (per truck)	period
liquid	500	200	~ ¥150 / truck	~ \pm 40 / truck	38.83 / truck	6 months
powder	207	0	~¥120 / truck	~¥0/truck	18 / truck	3 months

